


PMR

Electronic reverse phase/phase loss relay



- Phase Monitoring Relay with built-in MCU
- Reverse phase/Phase loss/Voltage unbalance protection
- Voltage unbalance factor: 2 - 15%
- Trip cause check function: 2-LED
- Strong environmental resistance
- Fail-safe Operation

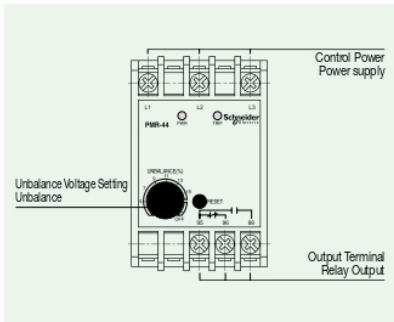

Protection Function

List	Operation Time
Reverse phase	0.1 seconds
Phase loss	1 second
Voltage unbalance	5 seconds [(Three phase arithmetical average voltage - Minimum line voltage) ÷ Three phase arithmetical average voltage] × 100% ± 2 - 15%
Fail-safe	No relay will be energized if the input power is abnormal.



Specifications

Input Voltage	Type	Setting range
	22	3 φ 160 - 300V, 50/60Hz
	44	3 φ 340 - 480V, 50/60Hz
Reset	Manual (Instant)/Electrical (distant) reset ※ If it is tripped due to abnormal input power, it will auto-reset 5 seconds after the input power returns to normal	
Auxiliary Contact	Format	1 - SPDT (1C)
	Rating	AC250V/5A Resistive load
	Status	Normally energized (If input power is normal, 95 - 96 open and 95 - 98 close.)
Installation	35mm DIN-rail/Rail	

Trip Cause Check

Condition	LED Signal (Pulse Chart)					
	Green LED		Red LED			
Normal operation	On	████████	Off	_____		
Unbalance	On	████████	On	████████		
Trip	Unbalance	Off	_____	On	████████	
	Phase Loss	R	Off	_____	Blinks once	████
		S	Off	_____	Blinks 2 times	██████
		T	Off	_____	Blinks 3 times	███████
Reverse phase trip		██████████	██████████	Alternate blinking	██████████	

※ If the cause of a trip occurs during the first time the power is supplied, the relay will not be energized and the cause will be displayed as shown in the table above.

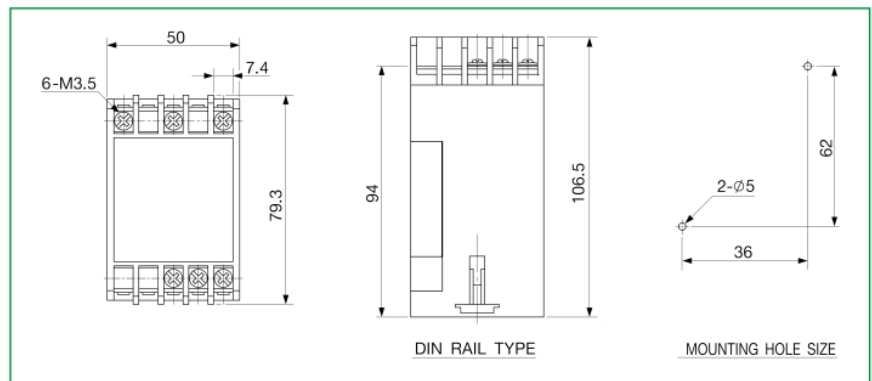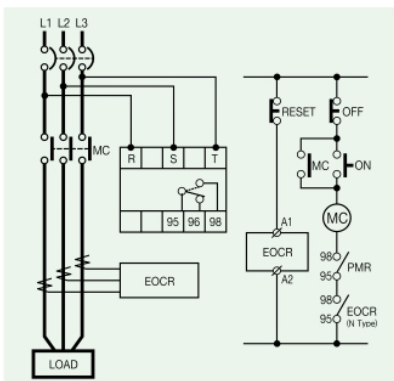

PMR

How to Order

Reference	Input Voltage [V]	Frequency [Hz]	Remark
PMR	AC220V	50/60	Panel/DIN Rail
	AC440V	50/60	Panel/DIN Rail

Ordering Example

To order a PMR:

P
M
R
-
2
2
0
N
7

❶
❷
❸

❶	Input Voltage	220	AC220V
		440	AC440V
❷	Output Contact Condition	N	Normally Energized
❸	Frequency	7	50/60Hz